


DCV SPDP-Series DC Motors – Upto 2240Watts

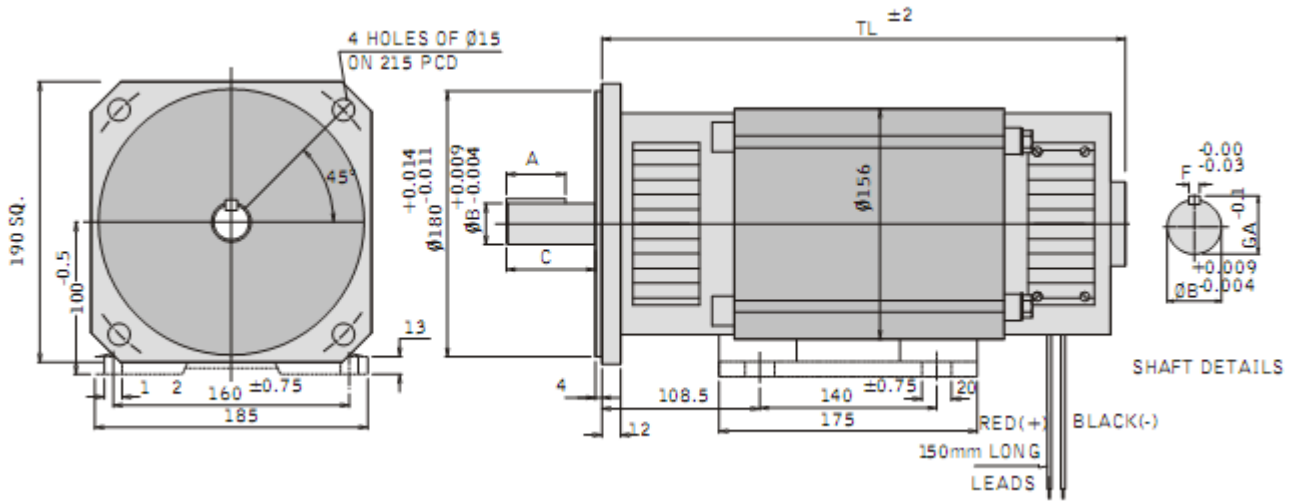

SPECIFICATIONS

| HP/ Watts | Frame Size | Volts | | | | Current (Amps) | | | | Torque (Kg.Cm) | Dimensions | | | | | | Wt. (Kg.) |
|--|---------------|-------|----|----|----|----------------|------|------|------|-------------------|------------|----|----|---|------|-----|--------------|
| | | V1 | V2 | V3 | V4 | I1 | I2 | I3 | I4 | | A | B | C | F | GA | TL | |
| 1500 RPM, F-CLASS, SPDP TYPE, S1 DUTY MOTOR, FOOT/FLANGE MOUNTING, WITH IP-21 PROTECTION | | | | | | | | | | | | | | | | | |
| 1.0/750 | V1 | 12 | 24 | 36 | 48 | 78 | 39.0 | 26.0 | 19.5 | 48 | 34 | 19 | 37 | 6 | 21.5 | 310 | 16 |
| 2.0/1490 | V2 | - | 24 | 36 | 48 | - | 78.0 | 52.0 | 39.0 | 95 | 40 | 24 | 50 | 8 | 27 | 385 | 23 |
| 3.0/2240 | V3 | - | - | 36 | 48 | - | - | 78.0 | 62.0 | 144 | 40 | 28 | 60 | 8 | 31 | 460 | 30 |
| 3000 RPM, F-CLASS, SPDP TYPE, S1 DUTY MOTOR, FOOT/FLANGE MOUNTING, WITH IP-21 PROTECTION | | | | | | | | | | | | | | | | | |
| 1.0/750 | V1 | - | 24 | 36 | 48 | - | 39.0 | 26.0 | 19.5 | 24 | 34 | 19 | 37 | 6 | 21.5 | 310 | 16 |
| 2.0/1490 | V2 | - | - | 36 | 48 | - | - | 52.0 | 39.0 | 48 | 40 | 24 | 50 | 8 | 27 | 385 | 23 |
| 3.0/2240 | V2 | - | - | - | 48 | - | - | - | 62.0 | 72 | 40 | 24 | 50 | 8 | 27 | 385 | 23 |

Choose between Foot & Flange Mounting. NEMA sizes also available.