


DCHK-Series DC Motors (4Pole TEFC) – Upto 1120Watts

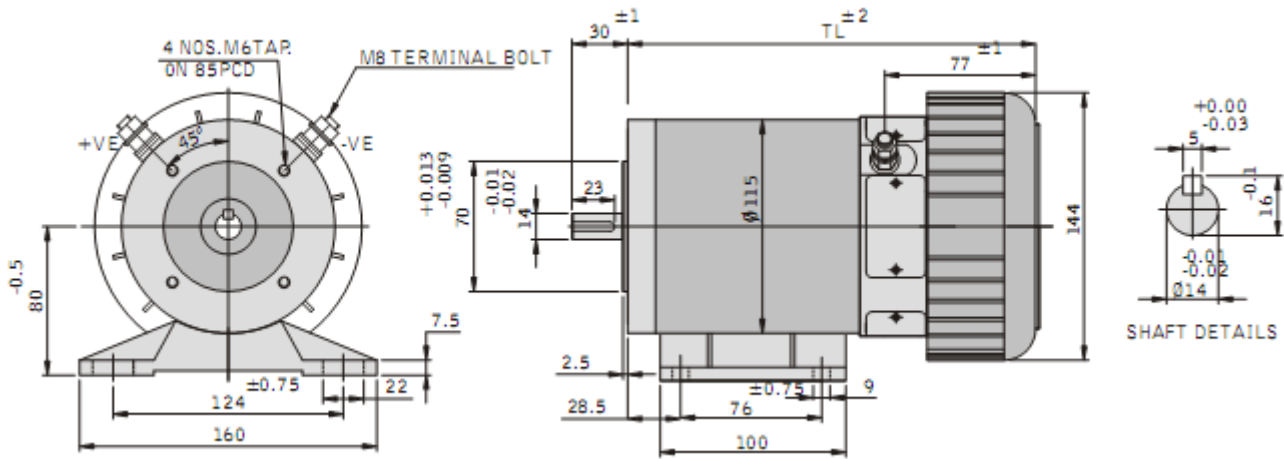

SPECIFICATIONS

H.P./Watts	Frame size	Volts				Current (Amps)				Torque (Kg.cm)	Mounting	Type	Ins. Class	Protection	Duty	TL	Wt. (kg)
		V1	V2	V3	V4	I1	I2	I3	I4								
1500 RPM MOTORS																	
0.25/ 180	HK-30	12	24	36	48	19.0	10.0	6.5	5.0	12	Foot/Face	TEFC	F	IP-44	S1	200	9
0.50 /370	HK-3	12	24	36	48	39.0	19.5	13.0	10.0	24	Foot/Face	TEFC	F	IP-44	S1	220	11
0.75 /560	HK-5	12	24	36	48	58.0	29.0	19.5	14.5	36	Foot/Face	TEFC	F	IP-44	S1	260	12
1.00/ 750	HK-7	-	24	36	48	-	39.0	26.0	19.5	48	Foot/Face	TEFC	F	IP-44	S1	300	14
3000 RPM MOTORS																	
0.50 /370	HK-30	12	24	36	48	39.0	19.5	13.0	10.0	12	Foot/Face	TEFC	F	IP-44	S1	200	9
0.75 560	HK-3	12	24	36	48	58.0	29.0	19.5	14.5	18	Foot/Face	TEFC	F	IP-44	S1	220	11
1.00/ 750	HK-5	-	24	36	48	-	39.0	26.0	19.5	24	Foot/Face	TEFC	F	IP-44	S1	260	12
1.50/1120	HK-7	-	24	36	48	-	58.5	39.0	29.0	36	Foot/Face	TEFC	F	IP-44	S1	300	14

Choose Between Foot & Face Mounting. NEMA sizes also available.