

F/R.L. COMBINATIONS




SPECIFICATION

TYPE		FRL802	FRL803	FRL804
		DESCRIPTION		
PORT SIZE (PT.NPT)		1/4"	3/8"	1/2"
FILTER ELEMENT		20u		
ADJ. PRESSURE RANGE		0.5 - 8.5kgf/cm ²		
MAXI SERVICE PRESSURE		9.9kgf/cm ²		
MAXI FLOW	(l/min)	1750	1950	2200
OPERATING TEMP RANGE		5 - 60 °C		
DRAIN CAPACITY		80ml		
OIL CAPACITY		125ml		
RECOMMENDABLE LUBRICANTS		ISO VG - 32		
TYPE OF CONSTITUTION UNIT	FILTER/REGULATOR	FR802	FR803	FR804
	LUBRICATOR	L802	L803	L804


ORDER EXAMPLE

FRL 80 3 - A

|
 |
 | AUTO DRAINAGE (OPTION)
 | POTY SIZE
 | 2 - 1/4"
 | 3 - 3/8"
 | 4 - 1/2"
 | TYPE SERIES
 F/R.L. COMBINATION

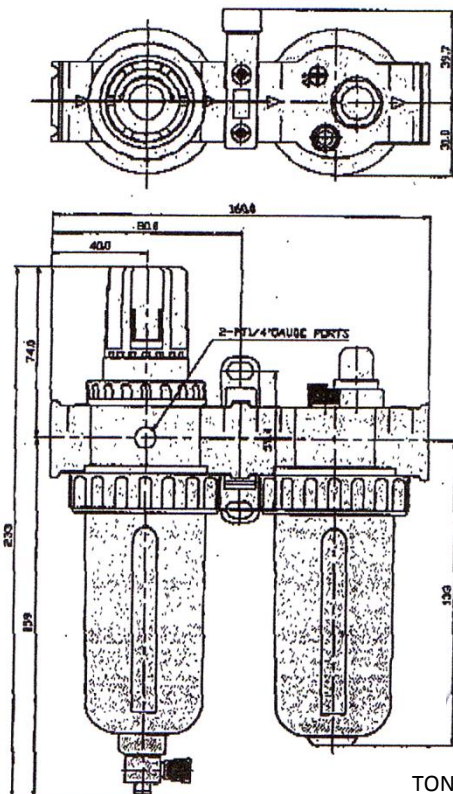

SYMBOL



TONSON Australia (SAMT) Pty Ltd.
 Factory 19 / 5 Lyn Parade PRESTONS NSW 2170
 PH: 02 9607 4100 FAX: 02 9607 4200

www.tonson-motor.com.au

